
CONTRACT NO. 44940

RTE.	SECT	ION]	COUN	ΤY	SHEETS	SHEET NO.
	PARK	ROADS	i	LASAL	LE	38	20
STA.			TO	STA.			
FED. ROA	D DIST. NO). ILLIM	IOIS	FED.	AID	PROJECT	



NOTES:

- 1. EFFECTIVE JANUARY 1, 1985, PUBLIC ACT 83-1316 AMENDED SEC, 11-301 OF "THE ILLINOIS VEHICLE CODE" TO REQUIRED HANDICAPPED PARKING SIGNS (FOR PARKING LOTS SUBJECT TO "THE ILLINOIS VEHICLE CODE") TO COMPLY WITH R7-8 SIGN SHOWN BELOW (U.S. DEPARTMENT OF TRANSPORTATION STANDARD), EXISTING SIGNS MAY REMAIN, BUT THEIR USEFUL LIVES SHALL NOT BE EXTENDED BY OTHER MEANS THAN NORMAL MAINTENANCE.
- 2. ALL DIMENSIONS IN INCHES, THIS SIGN TO BE USED WITH R7-1101.
- 3. THIS SIGN SHALL BE PLACED AT ALL HANDICAP PARKING SPACES.
- 4. THE ARROW SHOULD BE OMITTED WHERE THERE IS ONLY ONE SPACE. THE ARROW MAY ALSO BE MADE TO POINT IN ONLY ONE DIRECTION. THE ARROW MAY ALSO BE REPLACED BY "TIME" SUCH AS 9 AM ~ 5 PM WHERE A PART TIME RESTRICTION EXISTS.
- 5. THIS IS A STANDARD SIGN AND MAY BE ORDERED FROM ANY TRAFFIC SIGN SUPPLIER BY NUMBER. THE SIGN MUST BE SUPPLEMENTED WITH THE ILLINOIS STANDARD R7-1101 PLATE GIVING THE AMOUNT OF THE FINE FOR ILLEGALLY PARKING IN THE RESERVED SPACES.
- 6.COLORS: LEGEND AND BORDER GREEN WHITE SYMBOL ON BLUE BACKGROUND BACKGROUND WHITE

REDUCE SPACING 50% ** SEE APENDIX "E" FOR SYMBOL PROPORTIONS

4	E G	
I	\$250 FINE	B
C	F	+


NOTES: 1. ALL DIMENSIONS IN INCHES.
2. THIS PAVEMENT MARKING SHALL BE PLACED AT ALL HANDICAP PARKING SPACES.


LEGEND AND BORDER - GREEN NON-REFLECTORIZED BACKGROUND - WHITE REFLECTORIZED

SIGN SIZE	DIMENSIONS								
2176	А	В	Ç	0	E	F	G	Н	
6x12	12.0	6.0	1,5	4.5	u	3.Ø	5.5	3.0	

SIGN SIZE	SERIES LINES	MARGIN	BORDER	BLK STD
6x12	*2C/3B	Ø . 37	0.37	B5-126

- 1. ALL DIMENSIONS IN INCHES. THIS SIGN TO BE USED WITH R7-8 (**S-2C & "1" -3" B=\$))
- 2. THIS SIGN SHALL BE PLACED AT ALL HANDICAP PARKING SPACES.
- 3. THIS PLATE MAY BE MOUNTED DIRECTLY BELOW THE R7-8 SIGN OR COMBINED WITH THAT SIGN ON A SINGLE 12 INCH BY 24 INCH PANEL.
- 4. FOR A FINE OF \$250, USE F=4.0 AND G=4.0 (REDUCE LETTER TO LETTER SPACING AS NECESSARY TO FIT.

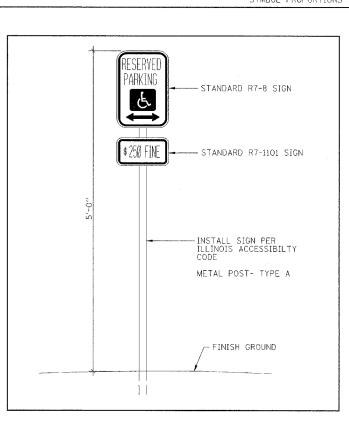

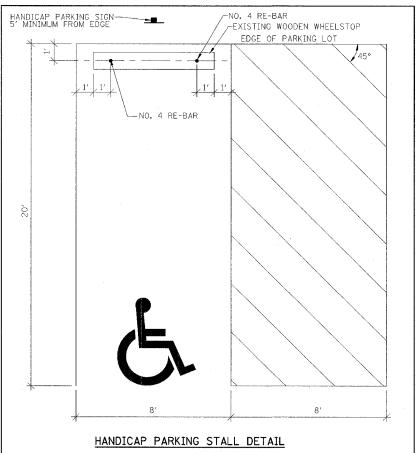

-1/4:1 MAX. SLOPE

PIPE BEDDING & EXCAVATION DETAIL

-HAND TAMPED BACKFILL -6"+D/2+T



